

编号 : XMIN2008007494CM_CN

: 2020-08-20 日期

页码 : 1 of 4

客户名称: 武义雄昶五金制造有限公司

客户地址: 浙江省武义县黄龙工业区5路6号

样品名称 点状盲道板

生产商 武义雄昶五金制造有限公司

材质牌号 不锈钢

其他信息 点状盲道板 XC-MDB6006Z

以上信息及样品由客户提供及确认,SGS不承担证实客户提供信息的准确性、适当性和(或)完整性的责任。

收样日期 2020-08-13 2020-08-13 测试开始时间 2020-08-20 测试结束时间 :

请见下页(除另有特别说明外,此报告结果仅对测试样品负责) 测试结果

通标标准技术服务有限公司厦门分公司

检测中心 授权签名

黄文明

授权签字人





编号 : XMIN2008007494CM_CN


日期 2020-08-20

页码 2 of 4

结果总结:

序号	测试项目	测试方法	结果
1	斜坡法(油湿状态)	AS 4586-2013 Amdt 1-	临界角平均值: 19.6°
l		2017 附录 D	等级:R11
2	2 摆锤法摩擦系数	参考 AS 4586-2013 Amdt	SRV "潮湿"=58
2	1去评仏序徐尔奴	1-2017 附录 A	等级:P5

原样照片:

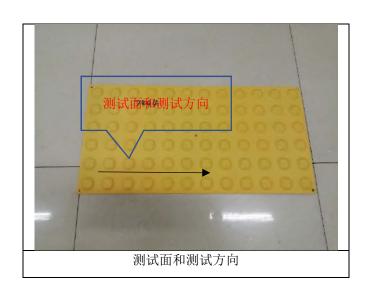



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic focuments, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/

No.31 Xianghong Road, Xiang'An Torch Industrial Zone, Xiamen, Fujian Province, China. 361101 t (86-592) 5765857 f (86-592) 5765380 www.sgsgroup.com.cn 中国·福建·厦门·火炬(翔安)产业区翔虹路31号 邮编:361101 t (86-592) 5765857 f (86-592) 5765380 e sgs.china@sgs.com

f (86-592) 5765380 e sgs.china@sgs.com



编号 : XMIN2008007494CM_CN

日期 : 2020-08-20

页码 : 3 of 4

1.测试项目: 斜坡法(油湿状态)

样品描述: 盲道板, 见照片

测试方法: AS 4586-2013 Amdt 1-2017 附录 D

测试条件:

试样: 600mm×300mm, 2片样品组成1个测试面1200mm×300mm, 见照片

测试面: 见照片 测试方向: 见照片

测试结果:

测试项目		测试结果	等级
	防滑(油湿斜坡法)	临界角平均值: 19.6°	R11

人行地面材料油湿斜坡法防滑性等级:

2 414 · BELL 4 1115 · BELL 4 24 · BELL 4 · B		
等级	临界角 (度数)	
无等级	X<6°	
R9	6°≤X<10°	
R10	10°≤X<19°	
R11	19°≤X<27°	
R12	27°≤X<35°	
R13	≥35°	



中国•福建•厦门•火炬(翔安)产业区翔虹路31号

f (86-592) 5765380 www.sgsgroup.com.cn f (86-592) 5765380 e sgs.china@sgs.com



编号 : XMIN2008007494CM CN

日期 : 2020-08-20

页码 : 4 of 4

2.测试项目:潮湿摆锤防滑性测试

样品描述: 盲道板, 见照片

测试方法:参考 AS 4586-2013 Amdt 1-2017 附录 A

测试条件:

试样: 300mm×300mm, 2片, 切取于原样

滑块型号: slider 96 (4S 橡胶)

测试面: 见照片 测试方向: 见照片

测试结果:

树 邑 日本:		
样品编号	1	2
BPN 摆锤防滑平均值 (单个测试面)	58	58
测定值 (SRV "潮湿")	58	
等级	P	² 5

人行地面材料潮湿摆锤法防滑性等级:

<u> </u>		
等级	等级 摆锤防滑值 SRV (slider 96)	
P5	>54	
P4	45-54	
P3	35-44	
P2	25-34	
P1	12-24	
P0	<12	

备注: 该检测报告为由 SGS 发布的原检测报告 编号: XMIN2008007494CM 日期: 2020 年 8 月 20 日 的中文译 本,本报告仅供参考。

******** 报告结束*******

在中华人民共和国境内,报告加盖 CMA 标识,表示检测项目在资质认定范围内;未加盖 CMA 标识, 表示部分/全部检测项目未在 CMA 资质认定范围内,结果仅供内部参考。



so otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service leaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at https://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document ed the first instructions or en Interms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-en-Document ed this document does not exonerate partial exorted in the superior services of the superior services and superior services and superior services at <a href="https://www.sgs.com/en/Terms-and-Conditions-and-Conditions-And-Conditions-

|No.31 Xianghong Road, Xiang/An Torch Industrial Zone, Xiamen, Fujian Province, China. 361101 t (86-592) 5765857 中国・福建・厦门・火炬(押安)产业区翔虹路31号 邮编:361101 t (86-592) 5765857 中国•福建•厦门•火炬(翔安)产业区翔虹路31号

f (86-592) 5765380 www.sgsgroup.com.cn f (86-592) 5765380 e sgs.china@sgs.com